


TECHNICAL DATA

Megamat ME 10/600



ISOLOGOMMA
***** Insulation technology

Via Dell'Artigianato Z.I. - 36020 - Albettono(VI) - Italy
info@isolgomma.com - www.isolgomma.com

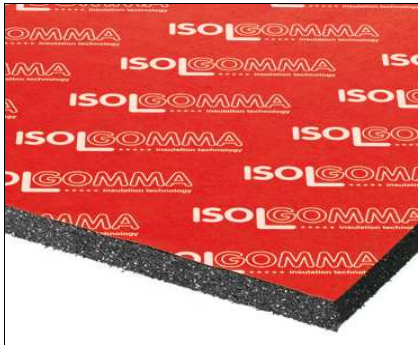

Product description and Technical Specification

Anti-vibration material supplied in panels, thickness 10 mm, produced using fibres and granules of SBR rubber (Stirene Butadiene Rubber) and granules of EPDM rubber (Ethylene Propylene Diene Monomer), selected and compacted using a polyurethane glue in a hot process. A non-woven, non-stretch synthetic membrane is applied on one side of panel, for added protection; density 600 kg/m³. Panels dimensions are m 1 length, m 1 width.

Application

Vibration insulation for floating floors or direct basement of machinery operating in cyclic or impulsive way

PHYSICAL CHARACTERISTICS	Unit	Value	Tolerance
Nominal thickness	mm	10	± 5%
Length	m	1.0	± 1%
Width	m	1.0	± 1%
Density (without backing)	kg/m ³	600	± 5%
Backing superficial mass	g/m ²	50	
Overall Superficial mass	kg/m ²	6.0	± 5%
Colour		black/red	

TECHNICAL CHARACTERISTICS	Norm	Unit	Value	Tolerance
Stress at strain 10%	EN 826	N/mm ²	0.159	± 10%
Static Modulus of Elasticity (Es) - strain 10%	EN 826	N/mm ²	1.579	± 10%
Dynamic Modulus of Elasticity (Ed) - strain 10%		N/mm ²	2,3 ÷ 2,8	± 10%
Static Shear Modulus (Gs)	ISO 1827	N/mm ²	0.22	± 10%
Natural frequency (fn) - strain 10%		Hz	23	± 2

PHYSICAL AND CHEMICAL PROPERTIES			
Temperature range of use		-20°C ÷ +110°C	
Inflammability	DIN 4102	B2	

PACKING AND STORING			
Product surface per pallet	m ²	180	
Pallet dimension	m x m	1,05 x 1,05	
Number of panels per pallet	n°	180	
Each pallet is wrapped and protected with a polythene film.			

INSTALLATION INSTRUCTIONS	
The panels have to be installed butt jointed to each other and fixed using polyurethane adhesive. We suggest all joints are sealed with our "Stik", self-adhesive tape.	

HEALTH & SAFETY	
This is not a dangerous material, therefore it is not subject to the European directive 67/648/CEE .	

The suggestions and technical information given above represent our knowledge regarding the properties and the product's uses. ISOLOGOMMA reserve the right to modify or update this data without prior notice. This document is the property of ISOLOGOMMA and all rights are therefore reserved

TECHNICAL DATA

Megamat ME 10/600




ISOLOGOMMA
***** Insulation technology

Via Dell'Artigianato Z.I. - 36020 - Albettono(VI) - Italy
info@isologomma.com - www.isologomma.com


Compression - EN 826

Strain (mm)	Stress (N/mm ²)
0.11	0.017
0.21	0.034
0.32	0.053
0.43	0.070
0.53	0.086
0.64	0.101
0.75	0.116
0.86	0.130
0.96	0.144
1.07	0.158
1.18	0.172
1.28	0.185
1.39	0.199
1.50	0.213
1.60	0.228
1.71	0.243
1.82	0.258
1.92	0.274
2.03	0.291
2.14	0.309

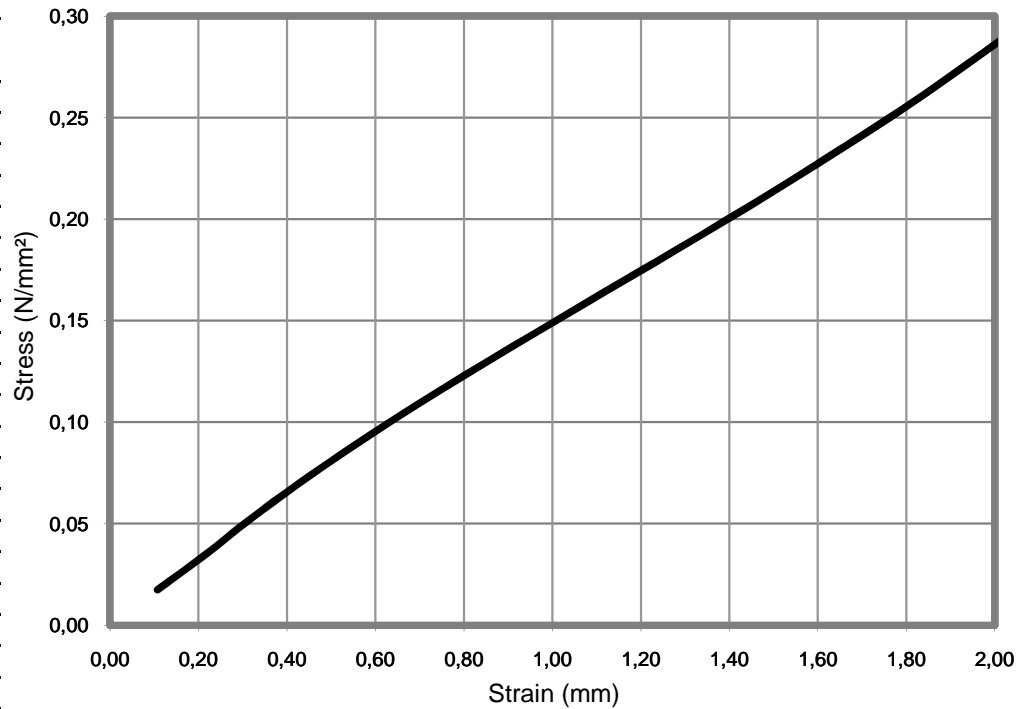

Static Modulus of Elasticity

Stress (N/mm ²)	Young Modulus (N/mm ²)
0.017	1.744
0.034	1.725
0.053	1.763
0.070	1.748
0.086	1.720
0.101	1.689
0.116	1.657
0.130	1.627
0.144	1.601
0.158	1.579
0.172	1.560
0.185	1.543
0.199	1.532
0.213	1.523
0.228	1.519
0.243	1.517
0.258	1.518
0.274	1.524
0.291	1.532
0.309	1.543

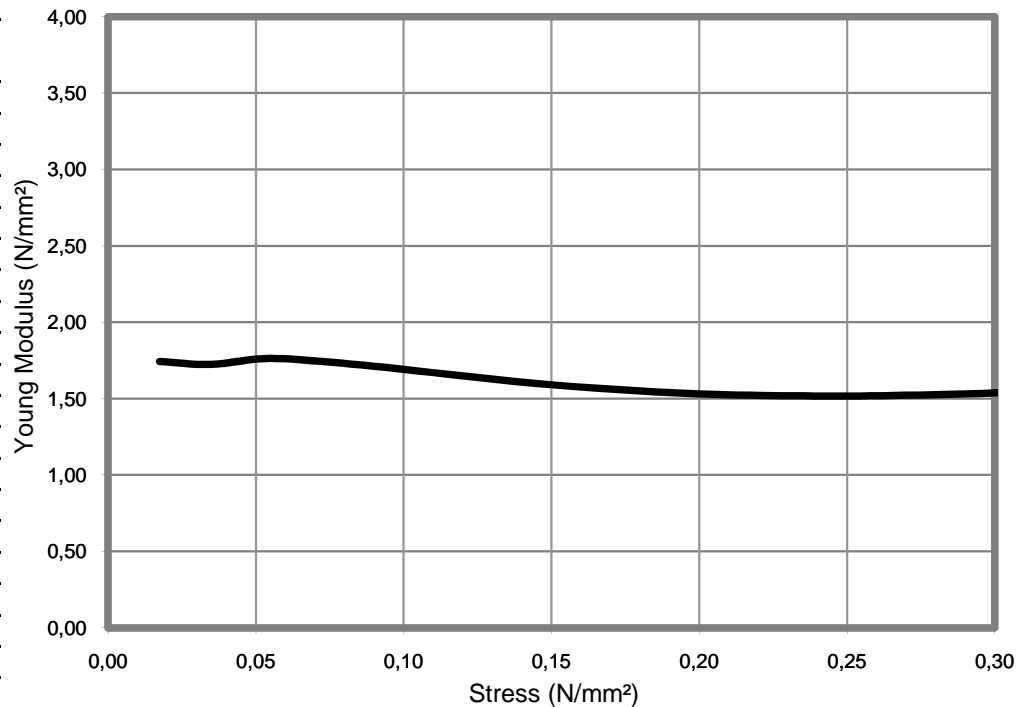


The suggestions and technical information given above represent our knowledge regarding the properties and the product's uses. ISOLOGOMMA reserve the right to modify or update this data without prior notice. This document is the property of ISOLOGOMMA and all rights are therefore reserved




Dynamic Modulus of Elasticity

Stress (N/mm ²)	Young Modulus (N/mm ²)
5 Hz	
0.04	2.47
0.08	2.17
0.12	2.96
0.20	4.17
10 Hz	
0.04	2.65
0.08	2.38
0.12	3.24
0.20	4.60
20 Hz	
0.04	2.76
0.08	2.56
0.12	3.46
0.20	5.07
40 Hz	
0.04	2.92
0.08	2.82
0.12	3.80
0.20	5.77

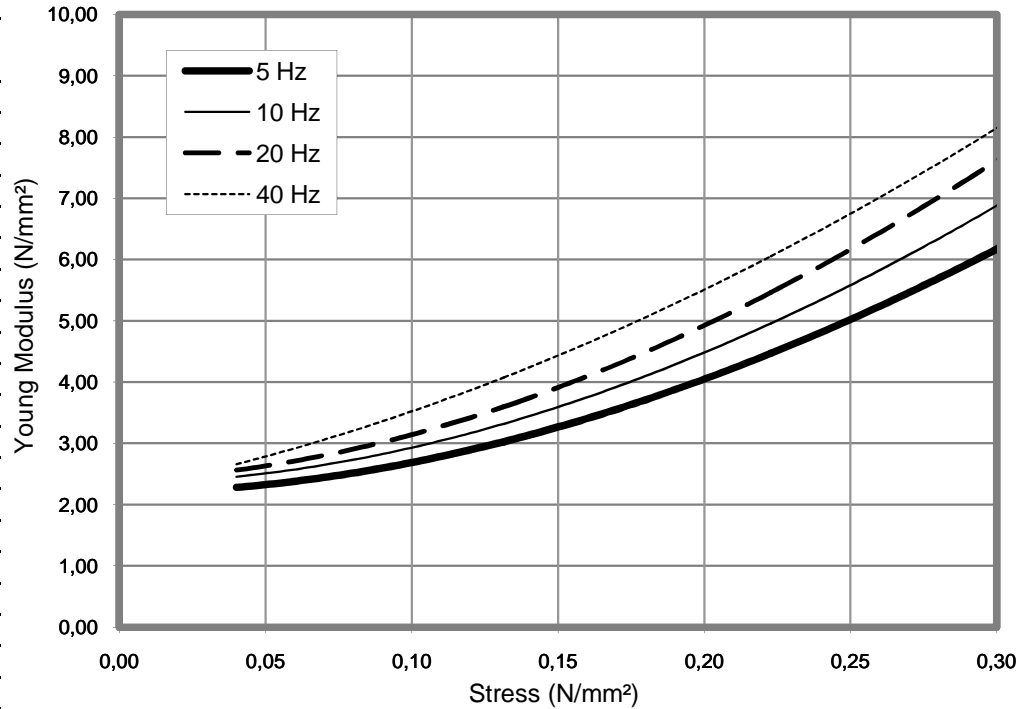

Horizontal scroll

Strain (mm)	Shearing stress (N/mm ²)
0.20	0.00226
0.40	0.00452
0.60	0.00678
0.80	0.00904
1.00	0.01130
1.20	0.01356
1.40	0.01582
1.60	0.01808
1.80	0.02034
2.00	0.02260
2.20	0.02486
2.40	0.02712
2.60	0.02938
2.80	0.03164
3.00	0.03390
3.20	0.03616
3.40	0.03842
3.60	0.04068
3.80	0.04294
4.00	0.04520

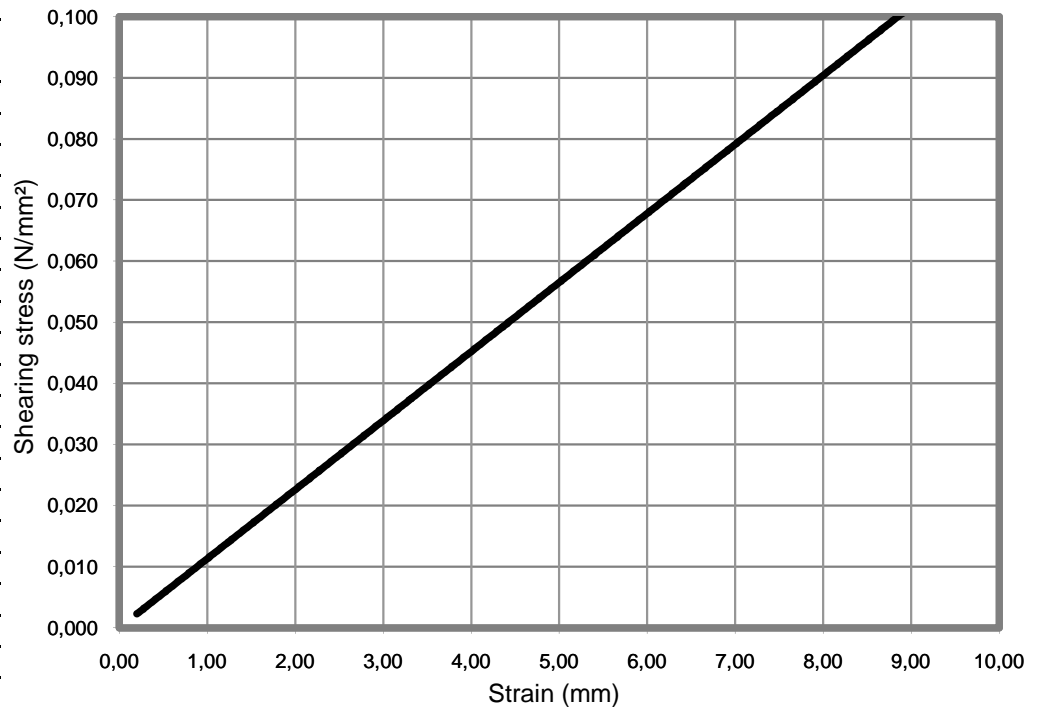


The suggestions and technical information given above represent our knowledge regarding the properties and the product's uses. ISOLGOMMA reserve the right to modify or update this data without prior notice. This document is the property of ISOLGOMMA and all rights are therefore reserved




Natural frequency

Natural (Hz)	Stress (N/mm ²)
20	0.3191
22	0.1807
24	0.1058
26	0.0689
28	0.0496
30	0.0400
32	0.0347
34	0.0308
36	0.0274
38	0.0236
40	0.0210
42	0.0188
44	0.0171
46	0.0156
50	0.0131
55	0.0107
60	0.0085
65	0.0065
70	0.0049
75	0.0037

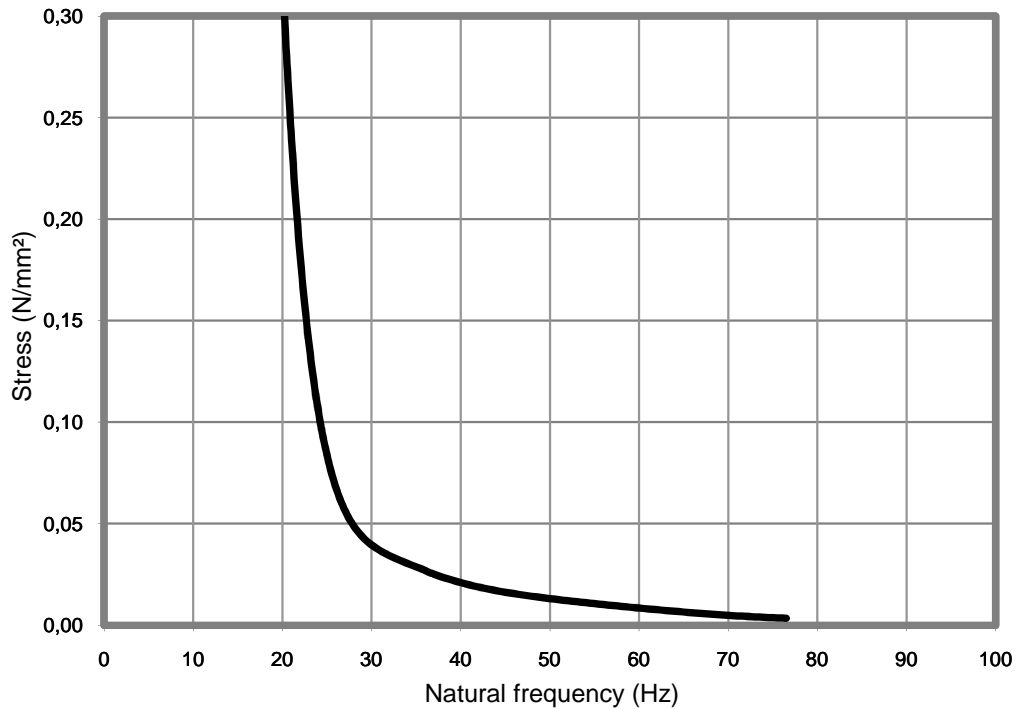

Vibration Isolation

ΔL_w
Transmission reduction on dB
η
degree of isolation on %

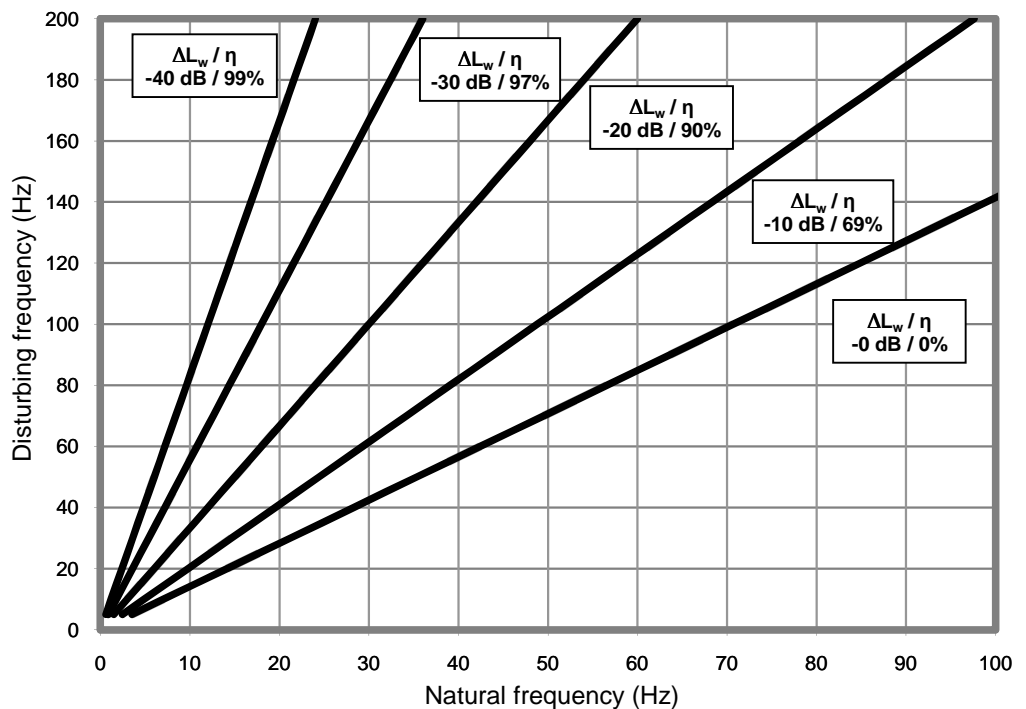

The suggestions and technical information given above represent our knowledge regarding the properties and the product's uses. ISOLGOMMA reserve the right to modify or update this data without prior notice. This document is the property of ISOLGOMMA and all rights are therefore reserved