


TECHNICAL DATA

Megamat ME20/800



ISOLOGOMMA
***** insulation technology

Via Dell'Artigianato Z.I. - 36020 - Albettono(VI) - Italy
info@isolgomma.com - www.isolgomma.com

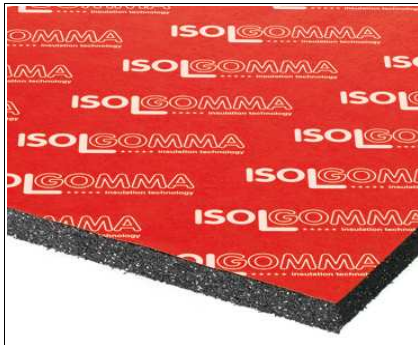

Product description and Technical Specification

Anti-vibration material supplied in panels, thickness 20 mm, produced using fibres and granules of SBR rubber (Stirene Butadiene Rubber) and granules of EPDM rubber (Ethylene Propylene Diene Monomer), selected and compacted using a polyurethane glue in a hot process. A non-woven, non-stretch synthetic membrane is applied on one side of panel, for added protection; density 800 kg/m³. Panels dimensions are m 1 length, m 1 width.

Application

Vibration insulation for floating floors or direct basement of machinery operating in cyclic or impulsive way

PHYSICAL CHARACTERISTICS	Unit	Value	Tolerance
Nominal thickness	mm	20	± 5%
Length	m	1.0	± 1%
Width	m	1.0	± 1%
Density (without backing)	kg/m ³	800	± 5%
Backing superficial mass	g/m ²	50	
Overall Superficial mass	kg/m ²	16.0	± 5%
Colour		black/red	

TECHNICAL CHARACTERISTICS	Norm	Unit	Value	Tolerance
Stress at strain 10%	EN 826	N/mm ²	0.230	± 10%
Static Modulus of Elasticity (Es) - strain 10%	EN 826	N/mm ²	2.300	± 10%
Dynamic Modulus of Elasticity (Ed) - strain 10%		N/mm ²	8.4 ÷ 9.5	± 10%
Static Shear Modulus (Gs)	ISO 1827	N/mm ²	0.34	± 10%
Natural frequency (fn) - strain 10%		Hz	21	± 2

PHYSICAL AND CHEMICAL PROPERTIES			
Temperature range of use		-20°C ÷ +110°C	
Inflammability	DIN 4102	B2	

PACKING AND STORING			
Product surface per pallet	m ²	90	
Pallet dimension	m x m	1,05 x 1,05	
Number of panels per pallet	n°	90	
Each pallet is wrapped and protected with a polythene film.			

INSTALLATION INSTRUCTIONS	
The panels have to be installed butt jointed to each other and fixed using polyurethane adhesive. We suggest all joints are sealed with our "Stik", self-adhesive tape.	


HEALTH & SAFETY	
This is not a dangerous material, therefore it is not subject to the European directive 67/648/CEE .	

The suggestions and technical information given above represent our knowledge regarding the properties and the product's uses. ISOLOGOMMA reserve the right to modify or update this data without prior notice. This document is the property of ISOLOGOMMA and all rights are therefore reserved




Compression - EN 826

Strain (mm)	Stress (N/mm ²)
0.22	0.021
0.65	0.068
1.08	0.116
1.51	0.160
1.94	0.205
2.37	0.248
2.80	0.286
3.23	0.329
3.67	0.374
4.10	0.421
4.53	0.473
4.96	0.528
5.39	0.590
5.82	0.658
6.25	0.734
6.69	0.822
7.12	0.917
7.55	1.022
7.98	1.139
8.41	1.269

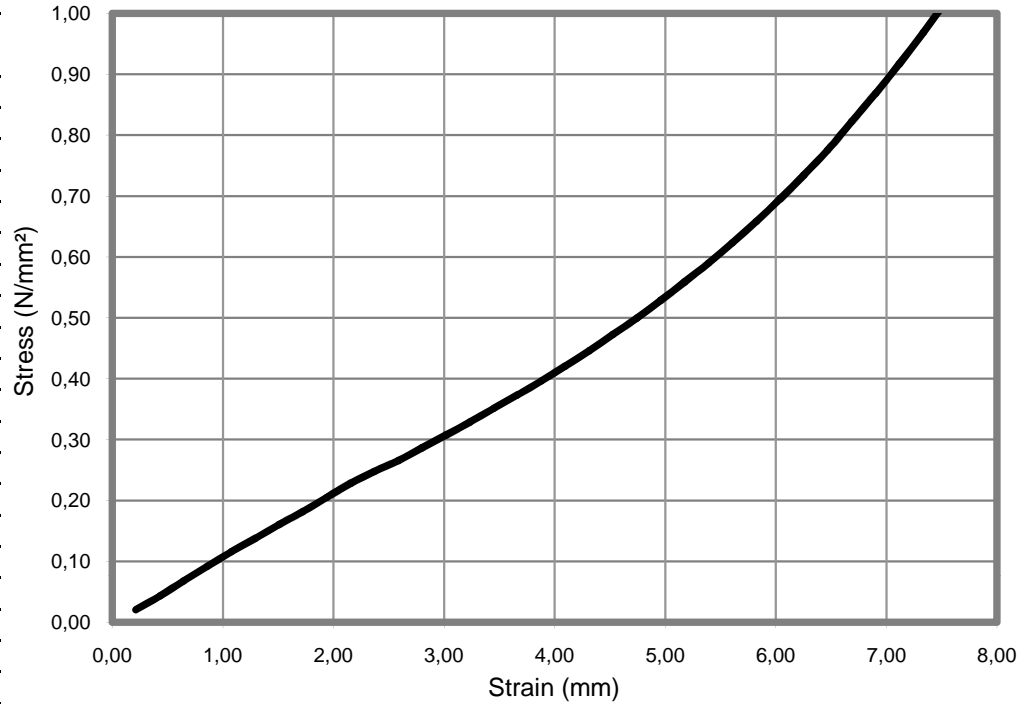

Static Modulus of Elasticity

Stress (N/mm ²)	Young Modulus (N/mm ²)
0.021	2.072
0.068	2.267
0.116	2.312
0.160	2.288
0.205	2.281
0.248	2.251
0.286	2.203
0.329	2.191
0.374	2.197
0.421	2.215
0.473	2.250
0.528	2.297
0.590	2.359
0.658	2.437
0.734	2.533
0.822	2.652
0.917	2.778
1.022	2.921
1.139	3.079
1.269	3.253

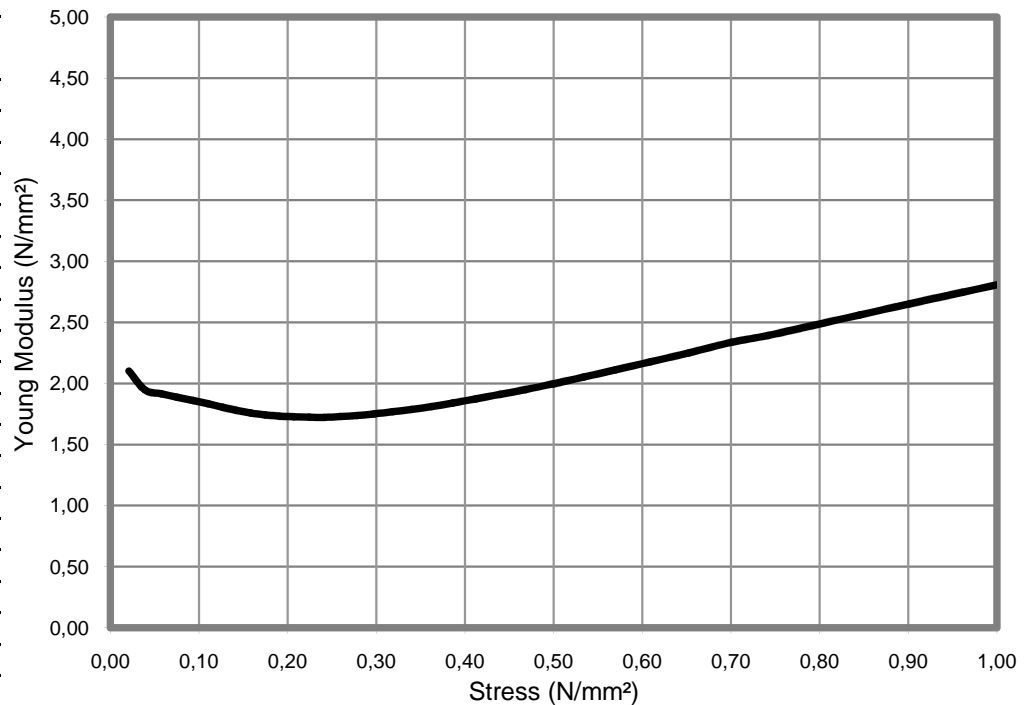


The suggestions and technical information given above represent our knowledge regarding the properties and the product's uses. ISOLOGOMMA reserve the right to modify or update this data without prior notice. This document is the property of ISOLOGOMMA and all rights are therefore reserved




Dynamic Modulus of Elasticity

Stress (N/mm ²)	Young Modulus (N/mm ²)
5 Hz	
0.12	7.04
0.20	7.37
0.35	8.60
0.90	20.82
10 Hz	
0.12	7.45
0.20	7.86
0.35	9.27
0.90	23.07
20 Hz	
0.12	7.82
0.20	8.23
0.35	9.71
0.90	25.42
40 Hz	
0.12	8.28
0.20	8.82
0.35	10.59
0.90	29.27

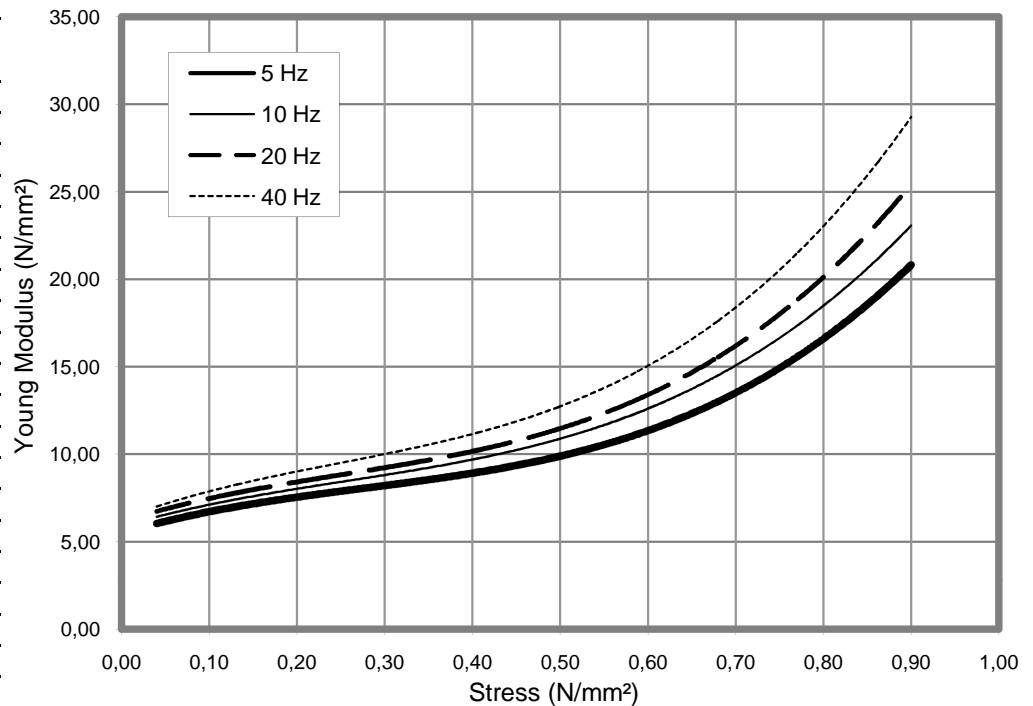

Horizontal scroll

Strain (mm)	Shearing stress (N/mm ²)
0.40	0.00342
0.80	0.00684
1.20	0.01026
1.60	0.01368
2.00	0.01710
2.40	0.02052
2.80	0.02394
3.20	0.02736
3.60	0.03078
4.00	0.03420
4.40	0.03762
4.80	0.04104
5.20	0.04446
5.60	0.04788
6.00	0.05130
6.40	0.05472
6.80	0.05814
7.20	0.06156
7.60	0.06498
8.00	0.06840

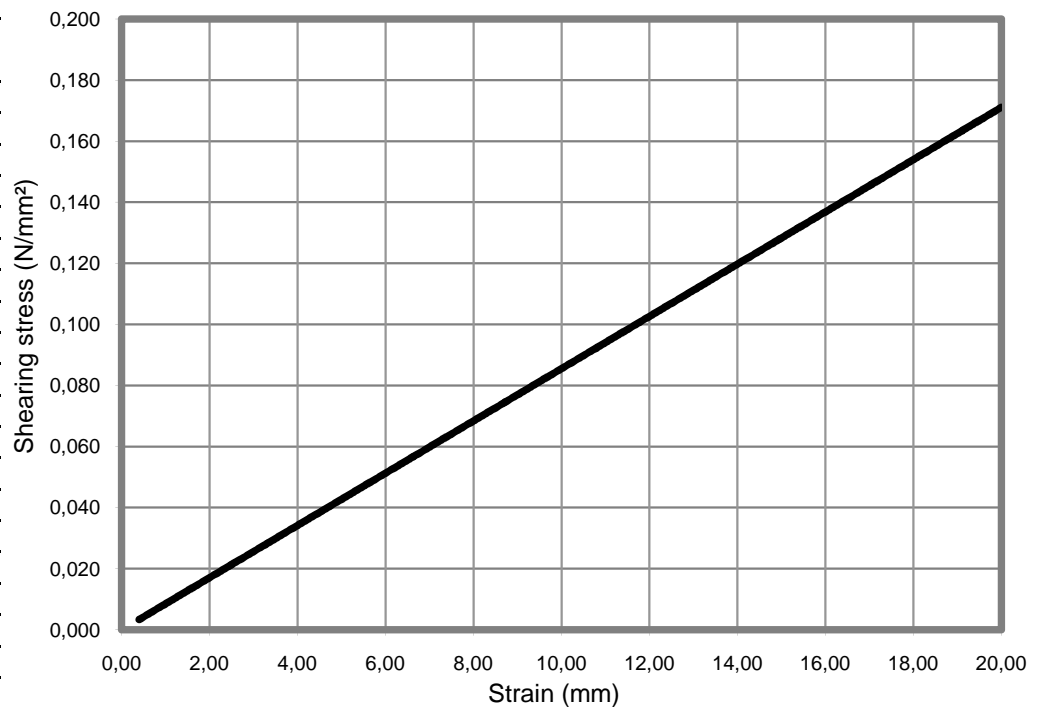


The suggestions and technical information given above represent our knowledge regarding the properties and the product's uses. ISOLOGOMMA reserve the right to modify or update this data without prior notice. This document is the property of ISOLOGOMMA and all rights are therefore reserved




Natural frequency

Natural (Hz)	Stress (N/mm ²)
5	-
10	1.5812
15	0.7906
20	0.3953
25	0.1976
30	0.1976
35	0.0856
40	0.0686
45	0.0559
50	0.0437
55	0.0337
60	0.0265
65	0.0199
70	0.0147
75	0.0112
80	0.0081
85	0.0057
90	0.0042
95	0.0028
100	0.0021

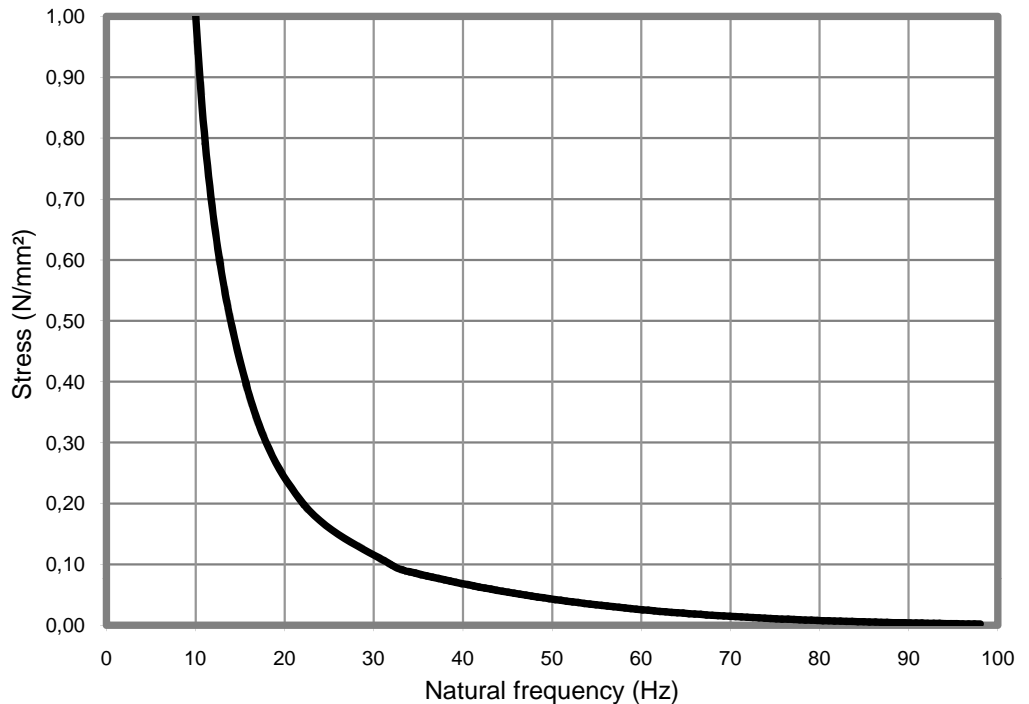

Vibration Isolation

ΔL_w
Transmission reduction on dB
η
degree of isolation on %

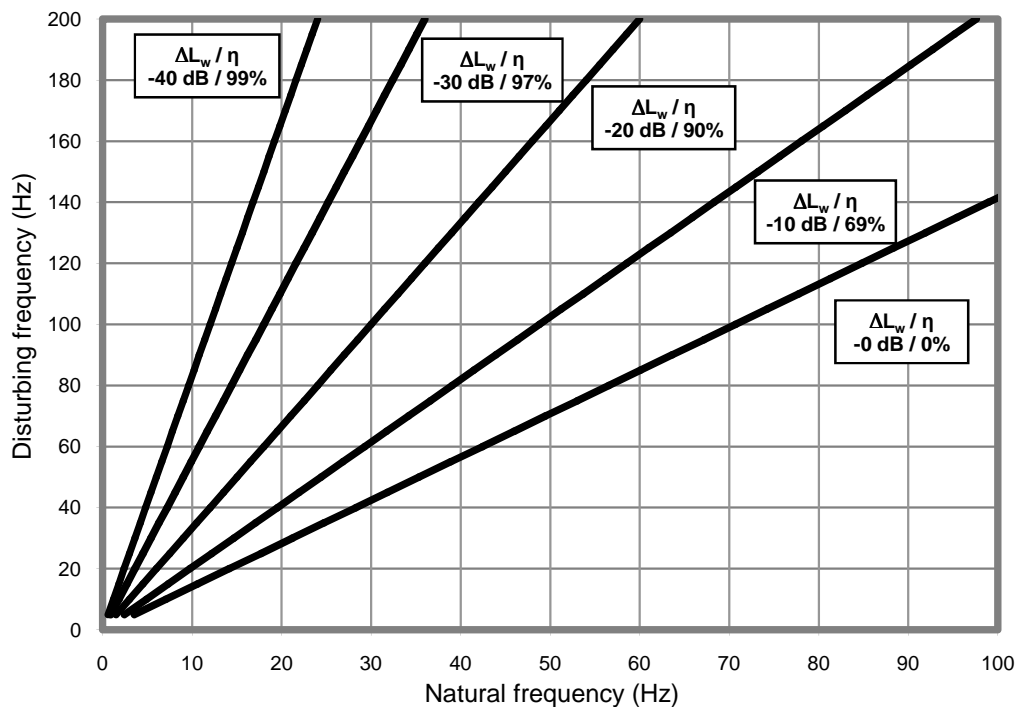

The suggestions and technical information given above represent our knowledge regarding the properties and the product's uses. ISOLGOMMA reserve the right to modify or update this data without prior notice. This document is the property of ISOLGOMMA and all rights are therefore reserved