


TECHNICAL DATA

Megamat ME30/500



ISOLOGOMMA
***** Insulation technology

Via Dell'Artigianato Z.I. - 36020 - Albettono(VI) - Italy
info@isolgomma.com - www.isolgomma.com

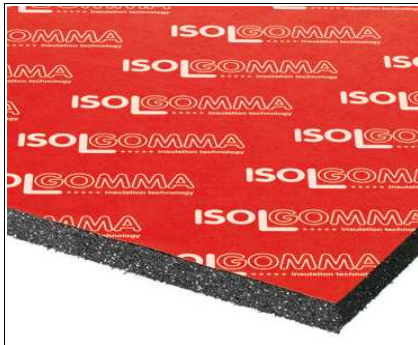

Product description and Technical Specification

Anti-vibration material supplied in panels, thickness 30 mm, produced using fibres and granules of SBR rubber (Stirene Butadiene Rubber) and granules of EPDM rubber (Ethylene Propylene Diene Monomer), selected and compacted using a polyurethane glue in a hot process. A non-woven, non-stretch synthetic membrane is applied on one side of panel, for added protection; density 500 kg/m³. Panels dimensions are m 1 length, m 1 width.

Application

Vibration insulation for floating floors or direct basement of machinery operating in cyclic or impulsive way

PHYSICAL CHARACTERISTICS	Unit	Value	Tolerance
Nominal thickness	mm	30	± 5%
Length	m	1.0	± 1%
Width	m	1.0	± 1%
Density (without backing)	kg/m ³	500	± 5%
Backing superficial mass	g/m ²	50	
Overall Superficial mass	kg/m ²	15.0	± 5%
Colour		black/red	

TECHNICAL CHARACTERISTICS	Norm	Unit	Value	Tolerance
Stress at strain 10%	EN 826	N/mm ²	0.045	± 10%
Static Modulus of Elasticity (Es) - strain 10%	EN 826	N/mm ²	0.446	± 10%
Dynamic Modulus of Elasticity (Ed) - strain 10%		N/mm ²	1.2 ÷ 1.5	± 10%
Static Shear Modulus (Gs)	ISO 1827	N/mm ²	0.16	± 10%
Natural frequency (fn) - strain 10%		Hz	17	± 2

PHYSICAL AND CHEMICAL PROPERTIES			
Temperature range of use		-20°C ÷ +110°C	
Inflammability	DIN 4102	B2	

PACKING AND STORING			
Product surface per pallet	m ²	60	
Pallet dimension	m x m	1,05 x 1,05	
Number of panels per pallet	n°	60	
Each pallet is wrapped and protected with a polythene film.			

INSTALLATION INSTRUCTIONS	
The panels have to be installed butt jointed to each other and fixed using polyurethane adhesive. We suggest all joints are sealed with our "Stik", self-adhesive tape.	


HEALTH & SAFETY	
This is not a dangerous material, therefore it is not subject to the European directive 67/648/CEE .	

The suggestions and technical information given above represent our knowledge regarding the properties and the product's uses. ISOLOGOMMA reserve the right to modify or update this data without prior notice. This document is the property of ISOLOGOMMA and all rights are therefore reserved




Compression - EN 826

Strain (mm)	Stress (N/mm ²)
0.29	0.006
0.59	0.011
0.88	0.016
1.18	0.021
1.47	0.025
1.76	0.029
2.06	0.033
2.35	0.037
2.65	0.041
2.94	0.045
3.23	0.048
3.53	0.052
3.82	0.056
4.12	0.060
4.41	0.064
4.70	0.069
5.00	0.073
5.29	0.077
5.59	0.082
5.88	0.085

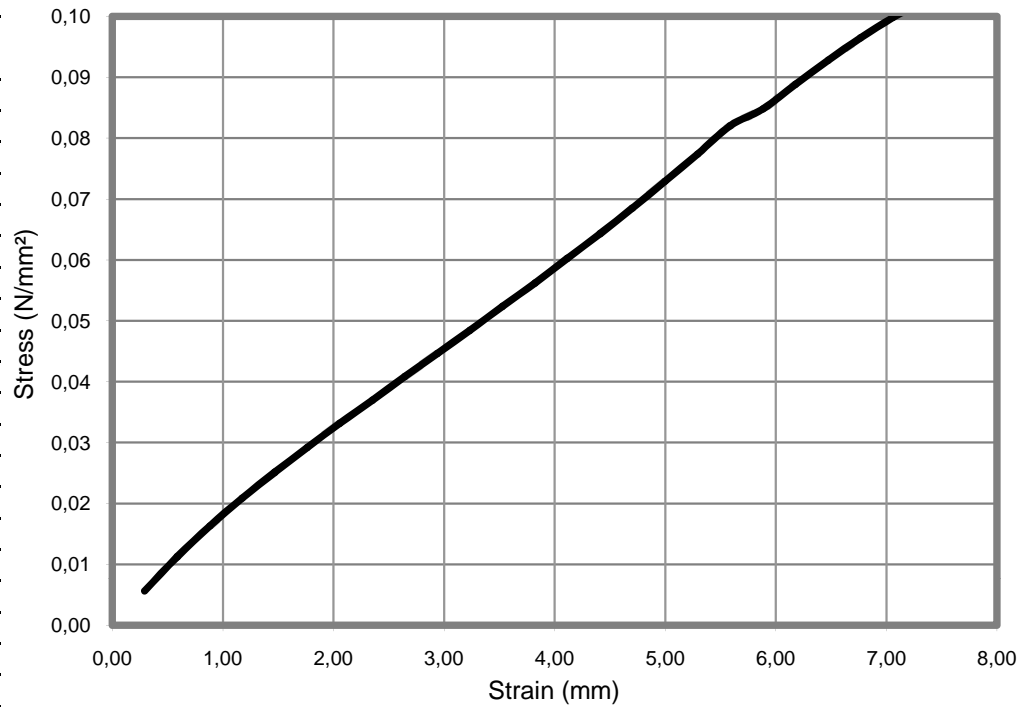

Static Modulus of Elasticity

Stress (N/mm ²)	Young Modulus (N/mm ²)
0.006	0.566
0.011	0.563
0.016	0.543
0.021	0.522
0.025	0.503
0.029	0.487
0.033	0.474
0.037	0.462
0.041	0.454
0.045	0.446
0.048	0.440
0.052	0.436
0.056	0.432
0.060	0.430
0.064	0.429
0.069	0.428
0.073	0.429
0.077	0.430
0.082	0.432
0.085	0.424

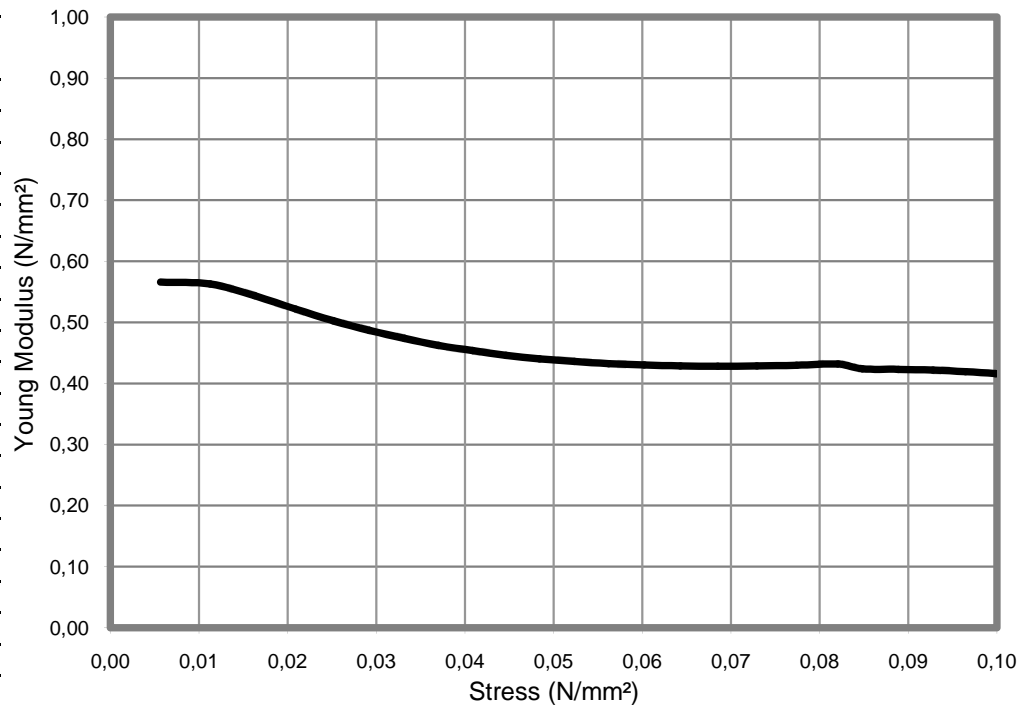


The suggestions and technical information given above represent our knowledge regarding the properties and the product's uses. ISOLOGOMMA reserve the right to modify or update this data without prior notice. This document is the property of ISOLOGOMMA and all rights are therefore reserved




Dynamic Modulus of Elasticity

Stress (N/mm ²)	Young Modulus (N/mm ²)
5 Hz	
0.04	1.24
0.08	1.97
0.12	2.66
0.20	4.50
10 Hz	
0.04	1.33
0.08	2.17
0.12	2.88
0.20	4.94
20 Hz	
0.04	1.36
0.08	2.24
0.12	3.09
0.20	5.36
40 Hz	
0.04	1.44
0.08	2.51
0.12	3.22
0.20	5.87

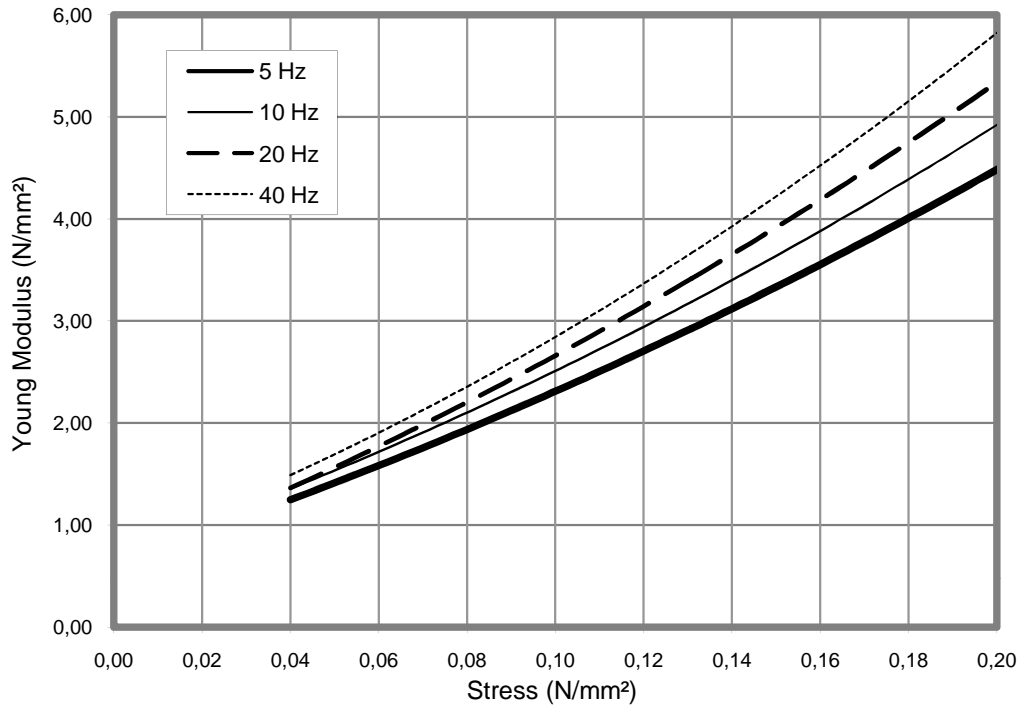

Horizontal scroll

Strain (mm)	Shearing stress (N/mm ²)
0.60	0.00164
1.20	0.00328
1.80	0.00492
2.40	0.00656
3.00	0.00820
3.60	0.00984
4.20	0.01148
4.80	0.01312
5.40	0.01476
6.00	0.01640
6.60	0.01804
7.20	0.01968
7.80	0.02132
8.40	0.02296
9.00	0.02460
9.60	0.02624
10.20	0.02788
10.80	0.02952
11.40	0.03116
12.00	0.03280

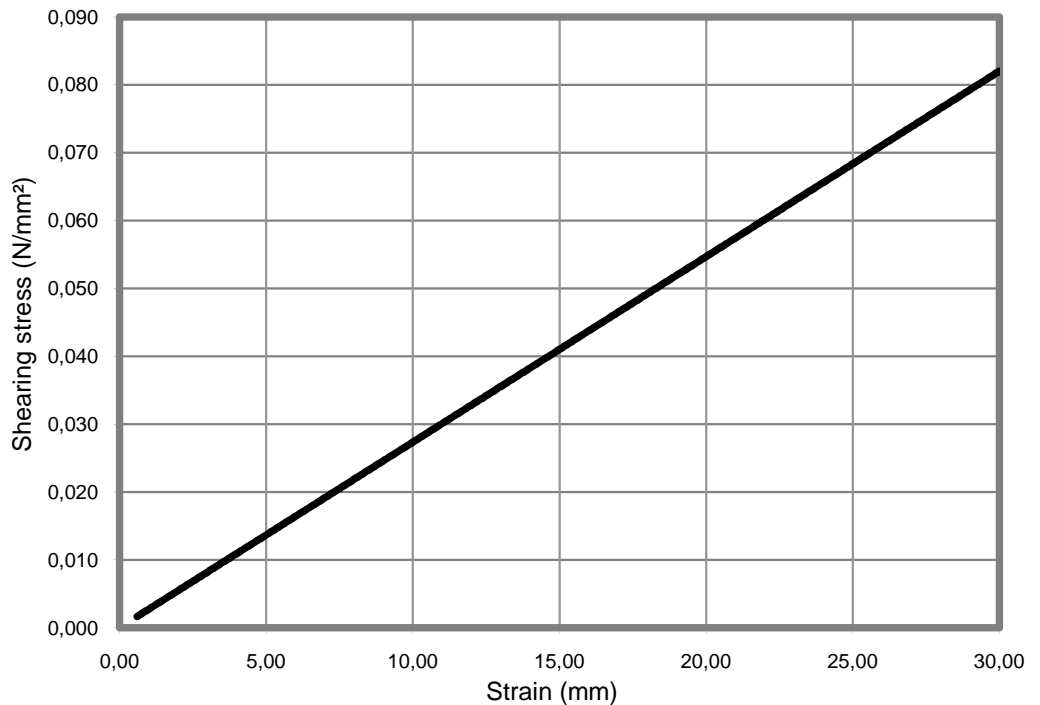


The suggestions and technical information given above represent our knowledge regarding the properties and the product's uses. ISOLOGOMMA reserve the right to modify or update this data without prior notice. This document is the property of ISOLOGOMMA and all rights are therefore reserved




Natural frequency

Natural (Hz)	Stress (N/mm ²)
12	1.2016
14	0.3125
16	0.0846
18	0.0391
20	0.0268
22	0.0213
24	0.0179
26	0.0158
28	0.0138
30	0.0125
32	0.0114
34	0.0101
36	0.0093
40	0.0077
45	0.0062
50	0.0052
55	0.0044
60	0.0039
65	0.0035
70	0.0032

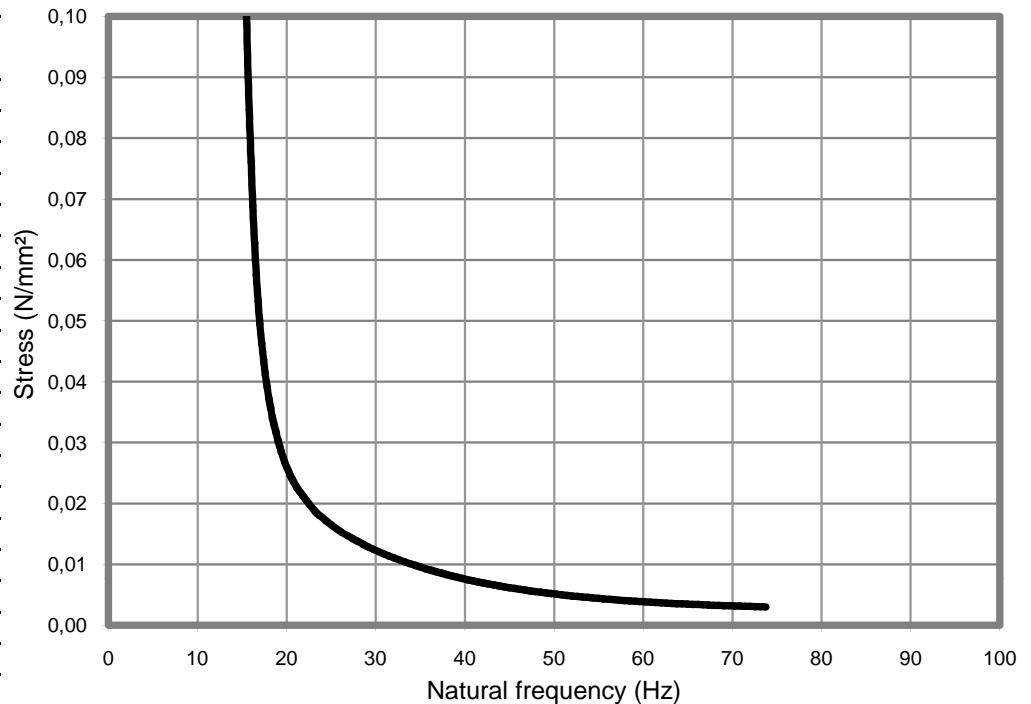

Vibration Isolation

ΔL_w
Transmission reduction on dB
η
degree of isolation on %

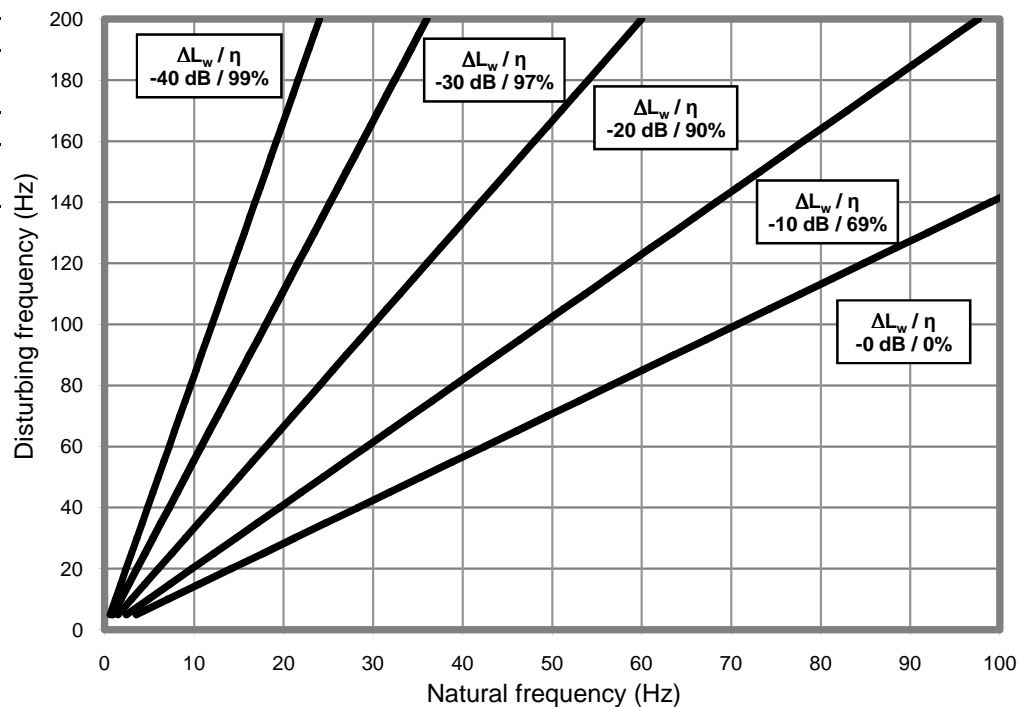

The suggestions and technical information given above represent our knowledge regarding the properties and the product's uses. ISOLGOMMA reserve the right to modify or update this data without prior notice. This document is the property of ISOLGOMMA and all rights are therefore reserved